
DATA SHEET



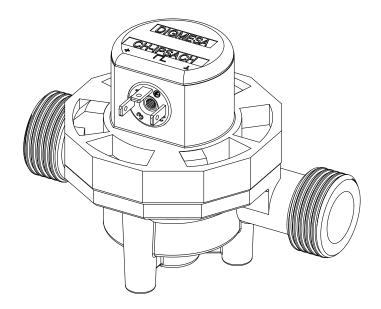

FFB2 50 Arnite Part number: 936-8550

Digmesa AG, Keltenstrasse 31, CH–2563 lpsach / Switzerland Phone +41 (32) 332 77 77, Fax +41 (32) 332 77 88 www.digmesa.com

Version 02 FFB2 50 936-8550 GB Seite 1-4

General Description

The FFB2 50 Flowmeter is a general-purpose precision device. It measures with constant precision and guarantees maximum accuracy in the measurement of fluid volumes. Its integrated electronic pulse emitter gives an additional guarantee for a practically unlimited useful life. This flowmeter is employed with great success in beer and premix dispensing systems. In addition to this, it can

Material:

Housing:	PBT 35%GF (Arnite)
Bearing pin:	Inox 1.4404, Ruby
O-ring:	MVQ (Silikon)
Turbine:	PVDF
Magnets:	Ceramic Sr Fe O (not in contact with the medium)

measure spirits or chemically-aggressive products and therefore finds much use in the most varied of industrial sectors just as accurately.

Special features: By means of its special jewelled bearing, its fitting position can be freely selected. Inlet and outlet are freely selectable.

0.34 - 11.5 l/min

<+/- 0.25%

-10°C to $+65^{\circ}$ C

14°F to 149°F 5.5 bar at 20°C

79 psi /68°F freely selectable

Ø 5.0mm

Technical data: Flow rate:

Repetition:

Temperature range:

Pressure range:

Mounting position: Nozzle size:

Continuous operation: <500 rpm Measuring accuracy: +/-2.0%


Approvals / Standards


EN55014-1:00+A1:01+A2:02, EN61000-6-3:01+A11:04, IEC61000-6-3:06(ed.2.0), EN61000-3-2:06, IEC61000-3-2:05(ed.3.0), EN61000-3-3:95+A1:01+A2:05, IEC61000-3-3:94+A1:01+A2:05(Cons.ed 1.2), EN55014-2:97+A1:01, EN61000-6-1:01, IEC61000-6-1:05(ed.2)





Electrical connection ratings:				
Power supply:	+3.8 to $+24$ VDC			
Consumption:	<8 mA			
Signal connection:	Open collector NPN			
Signal voltage:	0 VDC GND (saturation <0.7 V)			
Signal load:	max. 20 mA			
Leakage current:	max. 10 µA			
Connections:	3Pin- AMP 2.8 x 0.8 mm			
Signal:	Square-wave output			
Duty Cycle:	~50%			

Abmessungen in mm:



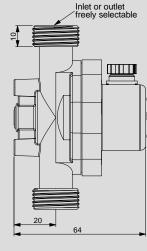

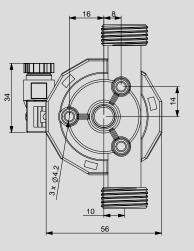



RESISTANCE

Special regulations which must be complied with by the flowmeter manufacturer apply to each country, e.g. CE, NSF, FDA and SK. The various media flowing through the flowmeter differ from application to application. You are advised to enquire with the medium manufacturer as to whether the entire installation and the flowmeter are resistant to the medium itself (see Material)!

ELECTRONIC

DIGMESA electronic circuitry is always designed for operation with DIGMESA flowmeters. Please note the following if connecting to other electronic circuitry:

• The flowmeter does not supply an output voltage but switches the signal terminal to 0 V ground (actuated) or leaves it open (nonactuated)

• There must be a pull-up resistor between power supply + and signal depending on electronic circuitry!


Version 02 FFB2 50 936-8550 GB Seite 2-4






We reserve the right to make modifications in the interests of technical progress


Interface Connection: Examples Open Collector

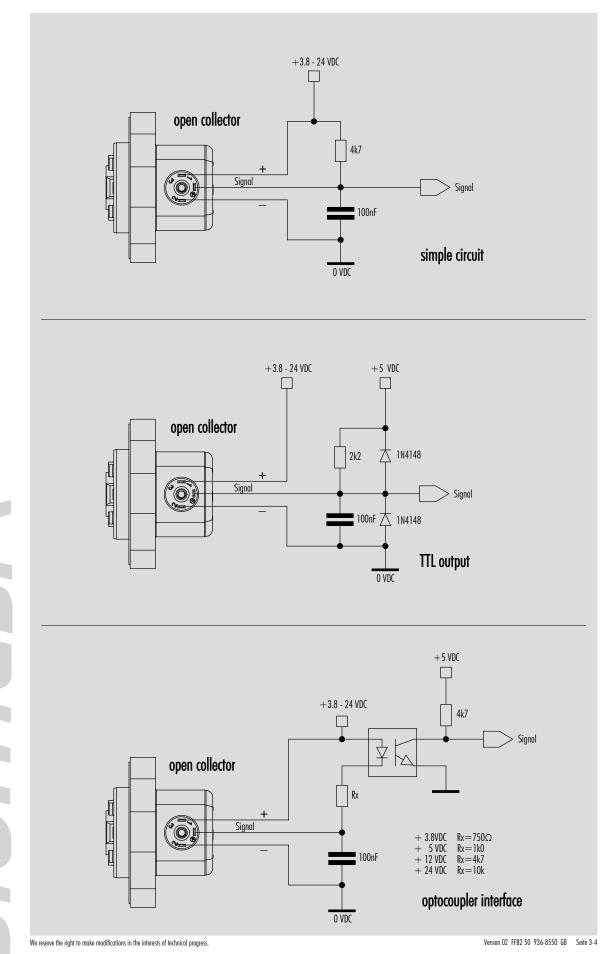

Digmesa AG, Keltenstrasse 31, CH-2563 Ipsach / Switzerland, Phone +41 (32) 332 77 77, Fax +41 (32) 332 77 88, www.digmesa.com

Measurement Curve FF Ø5.00 mm

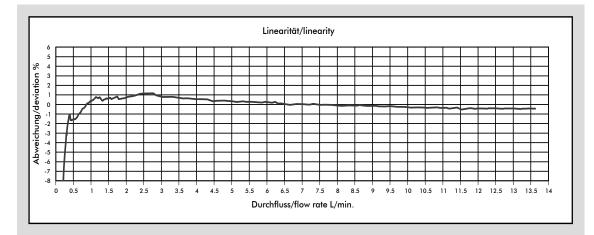

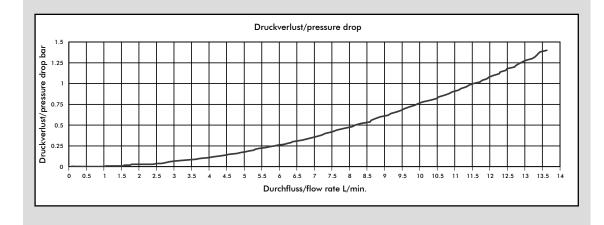

Medium: Water / max. Pressure: 3.3 bar

Nozzle size	Pulses/litre	g/pulse	min. flow rate in litres/min at Linear start	max. flow rate in litres/min	Pressure loss (bar)
Ø 5.00 mm	247	4.05	0.34	11.50	1.0

The values specified must be considered as approximate values.

The number of pulses per litre may differ depending on medium and installation. We recommend to calibrate the number of pulses per litre in line with the complete installation.

MEASUREMENT TIPS

- Ensure that there is no fast-pulsatory movement of the media
- Ensure that there are no reverse pressure surges
- Ensure that there is no air in the system
- Keep the pressure loss as small as possible
- Note the mounting position of the flowmeter
- Min/max flow should be in the linear range of the selected flowmeter
- Clean the system at appropriate intervals
- Avoid electrical current peaks
- Incorrect cabling of power supply +, signal and ground will destroy the flowmeter
- Do not mechanically load electrical contacts
- Avoid moisture on the electrical contacts
- Avoid stray pick-up via the cable (Do not lay cables in parallel with high current loads)

We reserve the right to make modifications in the interests of technical progress.

Version 02 FFB2 50 936-8550 GB Seite 4-4